
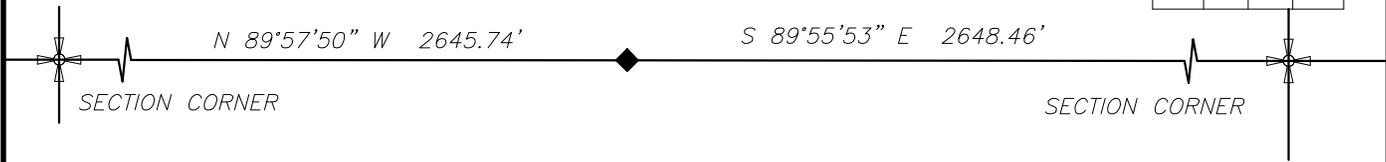


DUCHESNE COUNTY MONUMENT SURVEY RECORD


T3S R5W

SEC 4
1/4 ———
SEC 9

U.S.B.&M.



NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (QUARTER CORNER) LOCATED AT LAT: 40°14'04.61632"N & LONG: 110°27'53.27367"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER



DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR WITH PLASTIC CAP STAMPED;
PLS 5561198 WITH STONE ALONGSIDE AT QUARTER CORNER



DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7258535.53
E: 1932028.08

LATITUDE: 40°14'30.78076" N
LONGITUDE: 110°27'19.21850" W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0050W0_340600

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 8 FEB '16

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

